

3.00mm(.118") Wire To Wire And Wire To Board Connector





Shenzhen Hongru Connector Co., Ltd

Email: yukyli@hrb-connector.com
 Tel: 86-0755 2709 6669
 Fax: 86-0755 2709 2392
 Skype: haiyuncheng-vivian
 Mobile(whatsapp): 86-186 8112 3590
 Website: http://www.hrb-connector.com

SPECIFICATIONS:

- Current Rating:5A AC,DC
 - Voltage Rating:250V AC,DC
 - Contact Resistance:10mΩ max.
 - Withstanding Voltage:1500V AC/minute
- Terminal
- Wire size:AWG#20~#24
 - Material:Phosphor bronze
 - Finish:Tin Plated
 - Thickness:0.20mm
 - Qty/Reel:10000pcs
 - Terminal In Housing Retention Force Requirement:2.5kg (Min.)

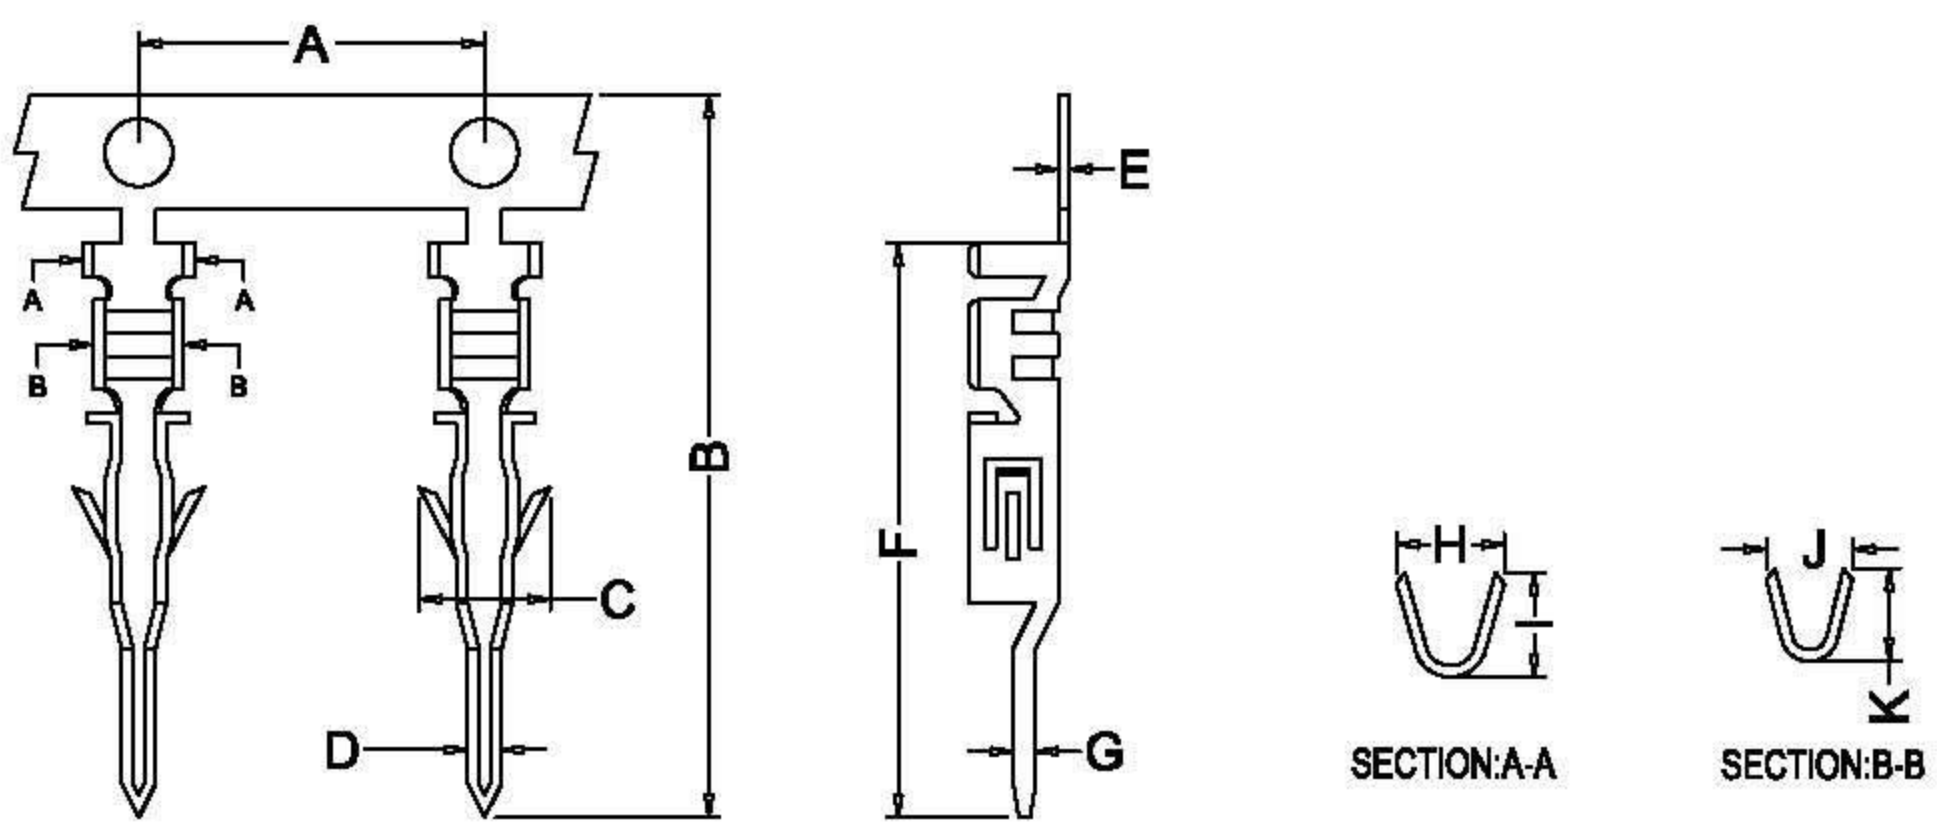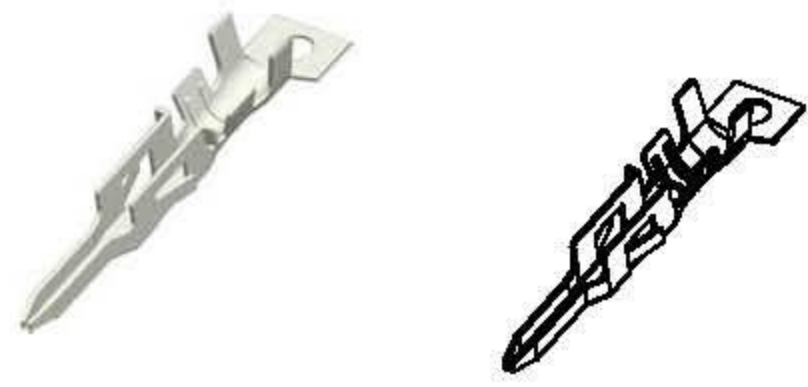

Ordering Information And Dimensions

Part NO.	A	B	C	D	E	F	G	H	I	J	K	Applicable wire	Plated
T3020PS-2	6.40	16.50	2.50	0.65	0.20	12.80	0.60	2.50	2.40	2.00	2.00	AWG#20~24	Tin-plated
T3020PS-2B	6.40	16.50	2.50	0.65	0.20	12.80	0.60	2.00	1.90	1.54	1.20	AWG#26~30	Tin-plated
T3020PS-00	6.40	16.50	2.50	0.65	0.20	12.80	0.60	2.50	2.40	2.00	2.00	AWG#20~24	Gold-plated
T3020PS-00B	6.40	16.50	2.50	0.65	0.20	12.80	0.60	2.00	1.90	1.54	1.20	AWG#26~30	Gold-plated

